

		75XS2E	55XS2E	49XS2E
PANEL	Screen Size	75" (74.52" Measured Diagonal)	55" (54.64" Measured Diagonal)	49" (48.50" Measured Diagonal)
	Panel Technology	IPS, M+ (WRGB)	IPS, M+ (WRGB)	IPS, M+ (WRGB)
	Aspect Ratio	16 : 9	16 : 9	16 : 9
	Native Resolution	3,840 x 2,160 (UHD)	1,920 x 1,080 (FHD)	1,920 x 1,080 (FHD)
	Brightness	2,500 cd/m ² (Typ.), 2,250 cd/m ² (Min.)	2,500 cd/m ² (Typ.), 2,250 cd/m ² (Min.)	2,500 cd/m ² (Typ.), 2,250 cd/m ² (Min.)
	Contrast Ratio (Typ.)	1,200:1	1,000:1	1,000:1
	Viewing Angle (H x V)	178 x 178	178 x 178	178 x 178
	Surface Treatment	Haze 3%, QWP	Haze 3%, QWP	Haze 3%, QWP
	Lifetime	50,000 Hrs	50,000 Hrs	50,000 Hrs
	Operation Hours	24 Hrs	24 Hrs	24 Hrs
Orientation	Landscape & Portrait	Landscape & Portrait	Landscape & Portrait	
CONNECTIVITY	Input	HDMI(2), DP, DVI-D, Audio, USB, SD Card	HDMI(2), DP, DVI-D, Audio, USB	HDMI(2), DP, DVI-D, Audio, USB
	Output	DP, External Speaker (L/R)	DP, External Speaker (L/R)	DP, External Speaker (L/R)
	External Control	RS232C In/out, RJ45 In, IR Receiver In	RS232C In/out, RJ45 In, IR Receiver In	RS232C In/out, RJ45 In, IR Receiver In
PHYSICAL SPECIFICATION	Bezel Color	Black	Black	Black
	Bezel Width	11.8 mm (Even)	12.0 mm (T/B), 9.9 mm (L/R)	9 mm (T/B), 6.5 mm (L/R)
	Monitor Dimension (W x H x D)	1,675.2 x 953.6 x 116 mm	1,235.5 x 709.4 x 85.4 mm	1,092.8 x 626.4 x 83.5 mm
	Weight (Head)	43 kg	24.7 kg	20.2 kg
	Carton Dimensions (W x H x D)	1,816 x 1,106 x 285 mm	1,344 x 215 x 820 mm	1,194 x 175 x 760 mm
	Packed Weight	52.2 kg	29.9 kg	24.7 kg
	Handle	Yes (2ea)	Yes (2ea)	Yes (2ea)
	VESA™ Standard Mount Interface	600 x 400 mm	600 x 400 mm	600 x 400 mm
SPECIAL FEATURES	Internal Memory (8GB, System 4GB + Available 4GB), Wi-Fi Dongle Ready, Temperature Sensor, Auto Brightness Sensor, Smart Energy Saving, USB Auto Playback, Local Contents Scheduling, Content Sync (RS232C, Local Network), OSD Rotation, Content Rotation, Tile Mode (Up to 15x15), Firmware Update by Network, SNMP, ISM Mode, Control Manager, DPM, PM Mode, Wake on LAN, HDMI-CEC ¹⁾			
ENVIRONMENTAL CONDITIONS	Operation Temperature ²⁾	0°C to 40°C	0°C to 45°C	0°C to 45°C
	Operation Humidity	10% to 85%	10% to 80%	10% to 80%
POWER	Power Type	Built-In Power	Built-In Power	Built-In Power
	Power Supply	100-240V~, 50/60Hz	100-240 V~, 50/60 Hz	100-240V~, 50/60Hz
	Power Consumption Typ. / Max. Smart Energy Saving	585 W / 600 W 280 W	240 W / 270 W 120 W	200 W / 240 W 100 W
STANDARD (CERTIFICATION)	Safety	IEC 60950-1 / EN 60950-1 / UL 60950-1	IEC 60950-1 / EN 60950-1 / UL 60950-1	IEC 60950-1 / EN 60950-1 / UL 60950-1
	EMC	FCC Class "A" / CE / KC / VCCI	FCC Class "A" / CE / KC / VCCI	FCC Class "A" / CE / KC / VCCI
	ErP / Energy Star	No / No	No / No	No / No
SOFTWARE COMPATIBILITY³⁾	Content Management Software	SuperSign CMS	SuperSign CMS	SuperSign CMS
	Control and Monitoring Software	SuperSign Control / Control+	SuperSign Control+	SuperSign Control+
ACCESSORIES	Basic	Remote Controller, Power Cord, HDMI Cable, Manual (ESG/EIG), IR Receiver (w/ Ambient Light Sensor)	Remote Controller, Power Cord, HDMI Cable, Manual (ESG/EIG), IR Receiver (w/ Ambient Light Sensor)	Remote Controller, Power Cord, HDMI Cable, Manual (ESG/EIG), IR Receiver (w/ Ambient Light Sensor)
	Optional	Wall Mount (LSW630), Wi-Fi Dongle (AN-WF500)	Landscape Wall Mount (WM-L640V), Portrait Wall Mount (WM-P640V), Wi-Fi Dongle (AN-WF500)	Landscape Wall Mount (WM-L640V), Portrait Wall Mount (WM-P640V), Wi-Fi Dongle (AN-WF500)

1) Compatibility may differ by equipment. 2) Without direct sunlight or with cooling systems in direct sunlight. 3) Software compatibility may change over time. Please contact your regional LG sales representative for details.


Conessioni

75XS2E / 55XS2E / 49XS2E



- 1) SPEAKER OUT
- 2) AUDIO IN
- 3) AUDIO OUT
- 4) LAN
- 5) HDMI IN 1
- 6) HDMI IN 2
- 7) IR & LIGHT SENSOR
- 8) DVI IN
- 9) DP OUT
- 10) HDMI IN 3
- 11) DVI-D IN
- 12) USB IN
- 13) RS232C IN
- 14) RS232C OUT

75"

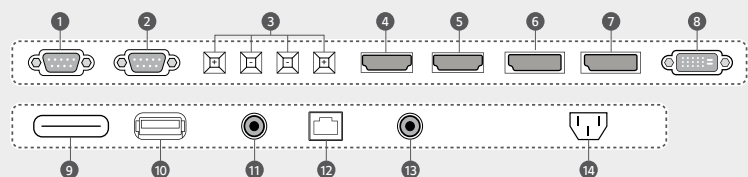

55"/49"

